



AVer Box type Camera

Installation Guide




Table of Contents


Important Safeguard	1
Package Contents.....	2
Optional Accessories	2
IP Camera Parts	3
Front Panel	3
Rear Panel.....	3
CS-Mount Lens	3
Setting Up the IP Camera.....	4
Connecting the Lens.....	4
Deploying Network.....	4
Network Connection via Ethernet Switch	4
Power over Ethernet Connection.....	5
RJ45 LED	5
Connecting the External Devices to I/O Terminal Block	6
Power LED.....	6
Internal Connection Diagram of DI/DO	6
Adjusting the CS-mount Ring.....	7
Focusing the IP Camera with BNC Monitor	8
Technical Specifications	9
SF2121H-R/FX2000	9
FX3000-R	11
Federal Communications Commission Statement (Class B)....	12
Class B (EMC).....	13
COPYRIGHT	13
NOTICE	13
WARNING	13
Limited Warranty	13
Limitations of Warranty.....	14
Disclaimer of Warranty	14
Limitation of Liability	14
Governing Law and Your Rights	14

Important Safeguard


- Do not use power supply with different voltage than the one supplied in this unit.




- Keep this unit away from direct heat or sunlight.




- Unplug the power of this unit as soon as smoke or unusual odor is detected.



- Do not expose this unit to rain or high humidity environment.



- Do not attempt to open the housing or service this unit by yourself. Always refer all servicing to qualified service personnel.




- Unplug the power supply before cleaning. Use only a lens cleaning cloth and never use benzene, thinner, or other solvent for cleaning.



- Avoid placing this unit in a dusty environment and avoid dust from entering the lens.




- Do not place the unit in unsteady surface and also do not drop the unit.




Package Contents

Make sure the following items are included in the package.



Aver box type camera



Camera Stand




3 Lens Ring Pad




Software & Manual CD



L-type Hex Wrench




3 Screws




3 Plastic Anchors

Optional Accessories



CS-mount Lens




Power Adapter (12V, 2A)

* The power adapter will vary depending on the standard power outlet of the country where it is sold. Depending on your package the power adapter maybe included.

IP Camera Parts


Front Panel

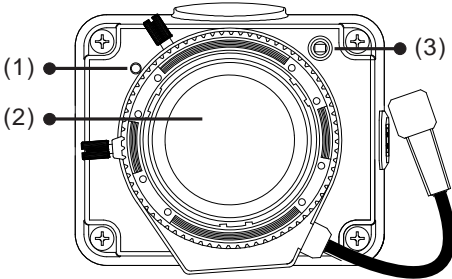

(fig. 1.1)

- (1) Built-in MIC
- (2) Lens
- (3) Light Sensor

Rear Panel

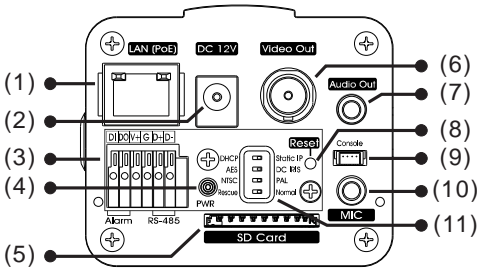


(fig. 1.2)

- (1) RJ45 Ethernet Port
- (2) DC 12V
- (3) I/O Terminal Block
- (4) Power LED Indicator
- (5) SD card slot
- (6) Video Out
- (7) Audio Out
- (8) Reset button
- (9) Console
- (10) MIC
- (11) DIP switch

Note: The reset button will set all the configuration settings back to factory default.

CS-Mount Lens

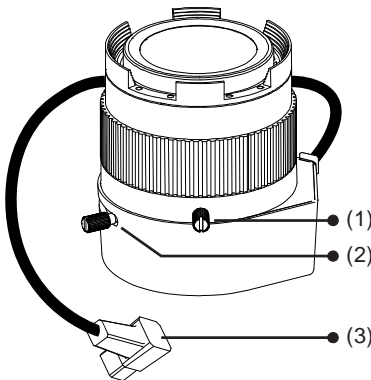

(fig. 1.3)

- (1) Zoom controller
- (2) Focus controller
- (3) DC-Iris control cable


Setting Up the IP Camera

This section provides useful tips on how to adjust the IP camera to meet your needs.


Connecting the Lens

1. Screw in the CS-mount lens clockwise to the CS-mounting ring.

Make sure the lens adhesive cover is removed when using it for the first time.

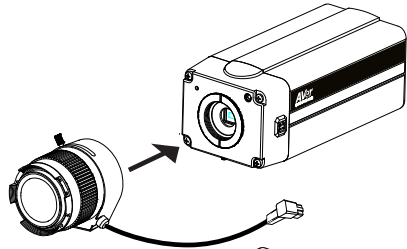


2. Connect the CS-mount lens cable to the socket.




Deploying Network

Network Connection via Ethernet Switch

1. Connect the RJ45 cable from the Ethernet switch to LAN (PoE) port of camera.

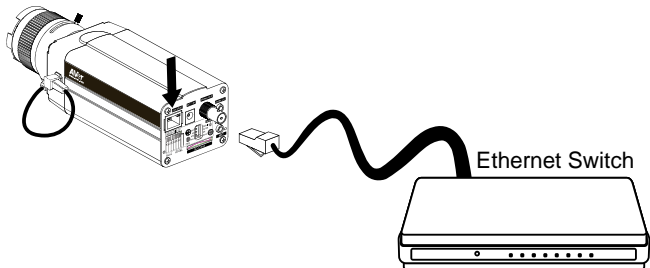


2. Connect the power adapter to DC12V port of camera.

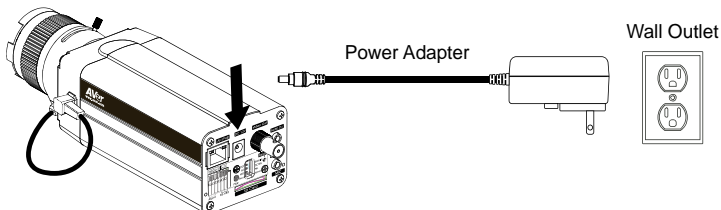


Power over Ethernet Connection

AVer box type camera is fully complied with PoE standard. It allows you to use PoE enabled switch or PoE injector to transmit data and power thru single Ethernet cable.

PoE Enabled Switch Connection Diagram

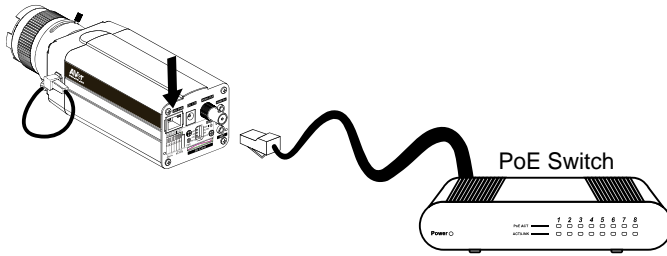

PoE Injector Connection Diagram

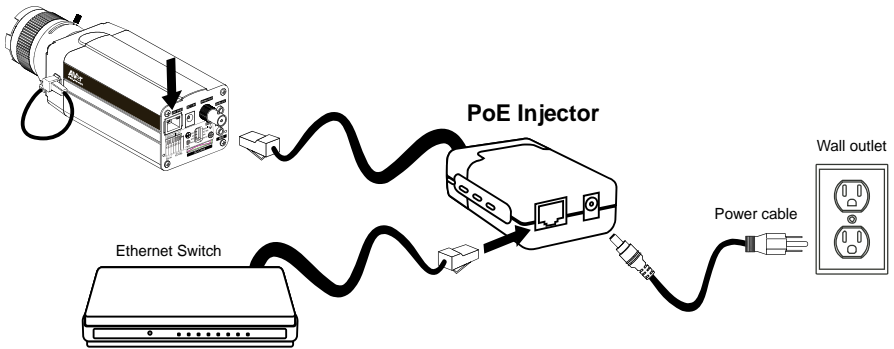


RJ45 LED

LED	Status
Blinking	Connected to 100 Base-T mode and
Green	also transmitting and receiving data.
Steady Yellow	Connected to the Internet.

Connecting the External Devices to I/O Terminal Block


- (1) Alarm Data In
- (2) Alarm Data Out
- (3) Power 12V support 200mA
- (4) Ground
- (5) RS-485 (+)
- (6) RS-485 (-)

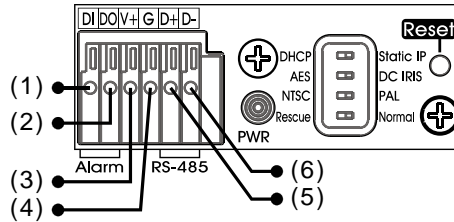

Power LED


LED	Status
Steady Red	Power on
Blinking Red	Firmware update complete
No Light	Power off

Internal Connection Diagram of DI/DO

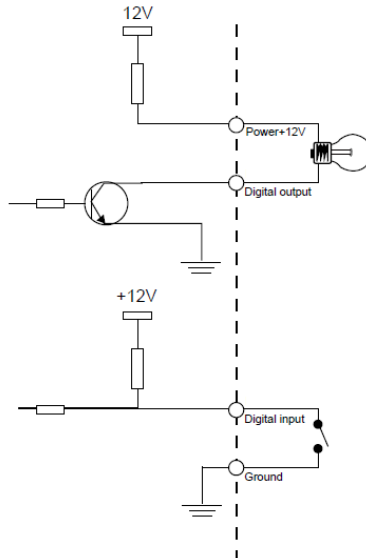


Adjusting the CS-mount Ring


1. Unplug the CS-mount lens cable from the socket.




2. Unscrew the CS-mount lens counterclockwise.

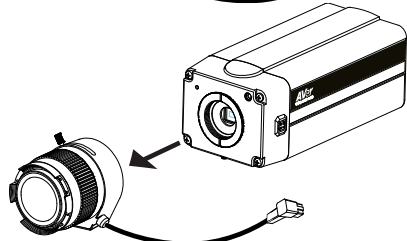

3. Place one lens ring pad.




4. Screw the CS-mount lens and connect the CS-mount lens cable to the socket. Check if the IP camera can display proper image. If not, repeat step 3 and 4 to add the next ring.

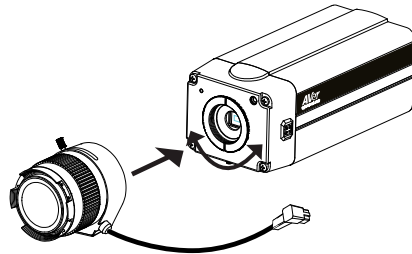


If all the rings are used up and still the IP camera cannot display proper image. Remove all the rings and continue to next step.


5. Using the L-type hex wrench loosen the bolt underneath the IP camera.




6. Remove the CS-mount ring from the IP camera.



7. Screw the CS-mount ring to the CS-mount lens.




8. Screw the CS-mount lens clockwise back. Unscrew a little and plug the CS-mount lens cable to the socket. Repeat this till the IP camera display the image properly.

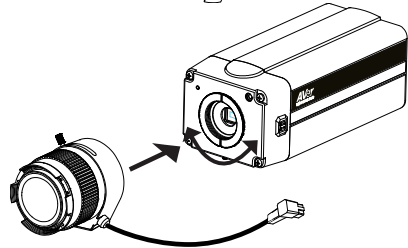

9. Once the IP camera has detected the image, use the L-type hex wrench slightly secure bolt underneath the IP camera.


Note: Do not fully tighten bolt underneath the IP camera for it may damage the CS-mount ring.




Focusing the IP Camera with BNC Monitor

The IP camera is supported with BNC analog video out port which allows you to connect an analog display devices such as an LCD BNC monitor for you to adjust the camera focus and zoom.

1. Connect the LCD BNC monitor to the Video Out port of IP camera using a BNC cable.

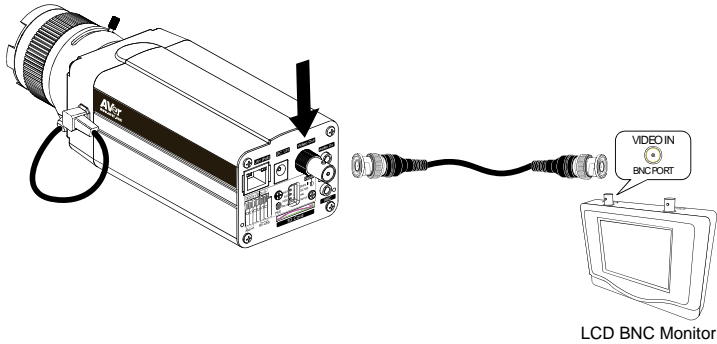

- Loosen up the focus and zoom control screws and adjust the focus and zoom range. Tighten the focus and zoom screw once you are done adjusting.

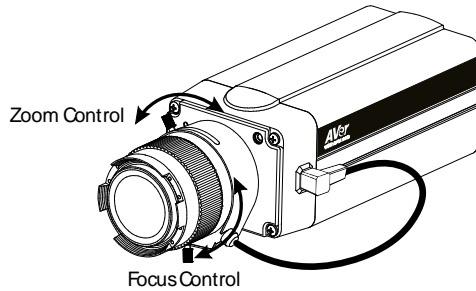

Technical Specifications

SF2121H-R/FX2000

Camera image

Min. illumination	0.15 Lux @F/1.2 in day mode (color) 0.001 Lux @F/1.2 in night mode (B/W)
Built-in mechanical ICR	yes
Auto IRIS	yes

Video

Compression	H.264/MPEG-4/MJPEG
Max. resolution	1920 x 1080
Frame rate	1920 x 1080 @ 30fps
H.264/MPEG-4 bit rate mode	VBR 5 levels CBR 64/128/512/768Kbps & 1/2/3/4/6/8/10/12Mbps
MJPEG quality	5 levels
Regional of Interest	yes
Smart Stream	yes, 5 windows
Image orientation	mirror, flip
Motion Detection zones	3

Privacy mask areas	3
BLC	yes
D-WDR	yes
De-noise	2D/3D
Day & night function	Auto/Manual/Schedule
ePTZ	yes
Audio	
Encoder	G.711 (μ -law)/G.726 (bit rate 16K~64bps) /AAC audio compression
Streaming	2-ways audio
Network	
protocols	TCP/IP (IPv4/IPv6), HTTP, HTTPS, UPnP, SMTP, FTP, DHCP, NTP, DDNS, PPPoE, Samba, QoS
Ethernet	10/100 Base-T, RJ45 connector
ONVIF	V2.X (Profile S), conformance test V12.06
Security	Password protection/IP Filter
Users	up to 10 users simultaneously
Event	
Profiles	32 sets
Triggers	Alarm Interval, Motion Detection Region, Digital Input, SD Card, Network
Actions	Trigger: Digital Output, Alarm Audio Send out video clip: FTP, NAS, SD card Send out snapshot / log: FTP, NAS, SD card, mail
Interface	
Digital input/output	1/1
BNC Video output	yes
Built-in storage option	SDHC card (32GB max.)
Built-in microphone	yes
External microphone input	yes
External Audio output	yes
RS-485	yes
General	
Power supply	DC 12V/PoE
Power consumption	DC: 5.0W (TYP) POE: 6.5W (TYP)
PoE	PoE Class 3 (IEEE802.3af)
Dimensions	L165.05 x H58.6 x W69 (mm)
Net weight	490g (w/o bracket)
Temperature and humidity	0°C~50°C, 20%~90%
Software Requirements	
OS	Windows® XP/7/8
Browser	IE 8/9/10
Firmware remote upgrade	yes (via HTTP)
Warranty	
Main body	2 years

Accessories

1 year

FX3000-R**Camera image**

Min. illumination	0.15 Lux@F/1.2 in day mode (color) 0.0015 Lux@F/1.2 in night mode (B/W)
Built-in mechanical ICR	yes
Auto IRIS	yes

Video

Compression	H.264/MPEG-4/MJPEG
Max. resolution	2048 x 1536
Frame rate	2048 x 1536 @ 20fps (Wide Angle) 1920 x 1080 @ 30fps (Normal mode)
H.264/MPEG-4 bit rate mode	VBR, 5 levels CBR, 64/128/512/768Kbps & 1/2/3/4/6/8/10/12Mbps
MJPEG quality	5 levels
Regional of Interest	yes
Smart Stream	yes, 5 windows
Image orientation	mirror, flip
Motion Detection zones	3
Privacy mask areas	3
BLC	yes
Sensor-WDR	yes
De-noise	2D/3D
Day & night function	Auto/Manual/Schedule
ePTZ	yes

Audio

Encoder	G.711 (μ -law)/G.726 (bit rate 16K~64bps) /AAC audio compression
Streaming	2-ways audio

Network

protocols	TCP/IP (IPv4/IPv6), HTTP, HTTPS, UPnP, SMTP, FTP, DHCP, NTP, DDNS, PPPoE, Samba, QoS
Ethernet	10/100 Base-T, RJ45 connector
ONVIF	V2.X (Profile S), conformance test V12.06
Security	Password protection/IP Filter
Users	up to 10 users simultaneously

Event

Profiles	32 sets
Triggers	Alarm Interval, Motion Detection Region, Digital Input, SD Card, Network
Actions	Trigger: Digital Output, Alarm Audio Send out video clip: FTP, NAS, SD card Send out snapshot / log: FTP, NAS, SD card, mail

Interface	
Digital input/output	1/1
BNC Video output	yes
Built-in storage option	SDHC card (32GB max.)
Built-in microphone	yes
External microphone input	yes
External Audio output	yes
RS-485	yes
General	
Power supply	DC 12V/PoE
Power consumption	DC: 5.0W (TYP) POE: 6.5W (TYP)
PoE	PoE Class 3 (IEEE802.3af)
Dimensions	L165.05 x H58.6 x W69 (mm)
Net weight	490g (w/o bracket)
Temperature and humidity	0°C~50°C, 20%~90%
Software Requirements	
OS	Windows® XP/7/8
Browser	IE 8/9/10
Firmware remote upgrade	yes (via HTTP)
Warranty	
Main body	2 years
Accessories	1 year

Federal Communications Commission Statement (Class B)



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by tuning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Class B (EMC)



This product is herewith confirmed to comply with the requirements set out in the Council Directives on the Approximation of the laws of the Member States relating to Electromagnetic Compatibility Directive 2004/108/EC.

COPYRIGHT

© 2013 AVer Information Inc. All rights reserved.

All rights of this object belong to AVer Information Inc. Reproduced or transmitted in any form or by any means without the prior written permission of AVer Information Inc. is prohibited. All information or specifications are subject to change without prior notice. "AVer" is a trademark owned by AVer Information Inc. Other trademarks used herein for description purpose only belong to each of their companies.

NOTICE

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. THE INFORMATION CONTAINED HEREIN IS TO BE CONSIDERED FOR REFERENCE ONLY.

WARNING

TO REDUCE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE. WARRANTY VOID FOR ANY UNAUTHORIZED PRODUCT MODIFICATION.



THE MARK OF CROSSED-OUT WHEELED BIN INDICATES THAT THIS PRODUCT MUST NOT BE DISPOSED OF WITH YOUR OTHER HOUSEHOLD WASTE. INSTEAD, YOU NEED TO DISPOSE OF THE WASTE EQUIPMENT BY HANDING IT OVER TO A DESIGNATED COLLECTION POINT FOR THE RECYCLING OF WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT. FOR MORE INFORMATION ABOUT WHERE TO DROP OFF YOUR WASTE EQUIPMENT FOR RECYCLING, PLEASE CONTACT YOUR HOUSEHOLD WASTE DISPOSAL SERVICE OR THE SHOP WHERE YOU PURCHASED THE PRODUCT.

Limited Warranty

For a period of time beginning on the date of purchase of the applicable product and extending as set forth in the "**Warranty Period of AVer Product Purchased**" section of the warranty card, AVer Information, Inc. ("AVer") warrants that the applicable product ("Product") substantially conforms to AVer's documentation for the product and that its manufacture and components are free of defects in material and workmanship under normal use. "You" as used in this agreement means you individually or the business entity on whose behalf you use or install the product, as applicable. This limited warranty extends only to You as the original purchaser. Except for the foregoing, the Product is provided "AS IS." In no event does AVer warrant that You will be able to operate the Product without problems or interruptions, or that the Product is suitable for your purposes. Your exclusive remedy and the entire liability of AVer under this paragraph shall be, at AVer's option, the repair or replacement of the Product with the same or a comparable product. This warranty does not apply to (a) any Product on which the serial number has been defaced, modified, or removed, or (b) cartons, cases, batteries, cabinets, tapes, or accessories used with this product. This warranty does not apply to any Product that has suffered damage, deterioration or malfunction due to (a) accident, abuse, misuse, neglect, fire, water, lightning, or other acts of nature, commercial or industrial use, unauthorized product modification or failure to follow instructions included with the Product, (b) misapplication of service by someone other than the manufacturer's representative, (c) any shipment damages (such claims must

be made with the carrier), or (d) any other causes that do not relate to a Product defect. The Warranty Period of any repaired or replaced Product shall be the longer of (a) the original Warranty Period or (b) thirty (30) days from the date of delivery of the repaired or replaced product.

Limitations of Warranty

AVer makes no warranties to any third party. You are responsible for all claims, damages, settlements, expenses, and attorneys' fees with respect to claims made against You as a result of Your use or misuse of the Product. This warranty applies only if the Product is installed, operated, maintained, and used in accordance with AVer specifications. Specifically, the warranties do not extend to any failure caused by (i) accident, unusual physical, electrical, or electromagnetic stress, neglect or misuse, (ii) fluctuations in electrical power beyond AVer specifications, (iii) use of the Product with any accessories or options not furnished by AVer or its authorized agents, or (iv) installation, alteration, or repair of the Product by anyone other than AVer or its authorized agents.

Disclaimer of Warranty

EXCEPT AS EXPRESSLY PROVIDED OTHERWISE HEREIN AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AVER DISCLAIMS ALL OTHER WARRANTIES WITH RESPECT TO THE PRODUCT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION, SATISFACTORY QUALITY, COURSE OF DEALING, TRADE USAGE OR PRACTICE OR THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT OF THIRD PARTY RIGHTS.

Limitation of Liability

IN NO EVENT SHALL AVER BE LIABLE FOR INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, PUNITIVE, OR CONSEQUENTIAL DAMAGES OF ANY NATURE INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS, DATA, REVENUE, PRODUCTION, OR USE, BUSINESS INTERRUPTION, OR PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES ARISING OUT OF OR IN CONNECTION WITH THIS LIMITED WARRANTY, OR THE USE OR PERFORMANCE OF ANY PRODUCT, WHETHER BASED ON CONTRACT OR TORT, INCLUDING NEGLIGENCE, OR ANY OTHER LEGAL THEORY, EVEN IF AVER HAS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. AVER'S TOTAL, AGGREGATE LIABILITY FOR DAMAGES OF ANY NATURE, REGARDLESS OF FORM OF ACTION, SHALL IN NO EVENT EXCEED THE AMOUNT PAID BY YOU TO AVER FOR THE SPECIFIC PRODUCT UPON WHICH LIABILITY IS BASED.

Governing Law and Your Rights

This warranty gives you specific legal rights; You may also have other rights granted under state law. These rights vary from state to state.