
Step 1.Format USB pen drive as FAT32 file format.


Step 2.Unzip compress file download from FTP site.


Step 3.Put the EXR6004Mini.bin to the root folder of pen drive

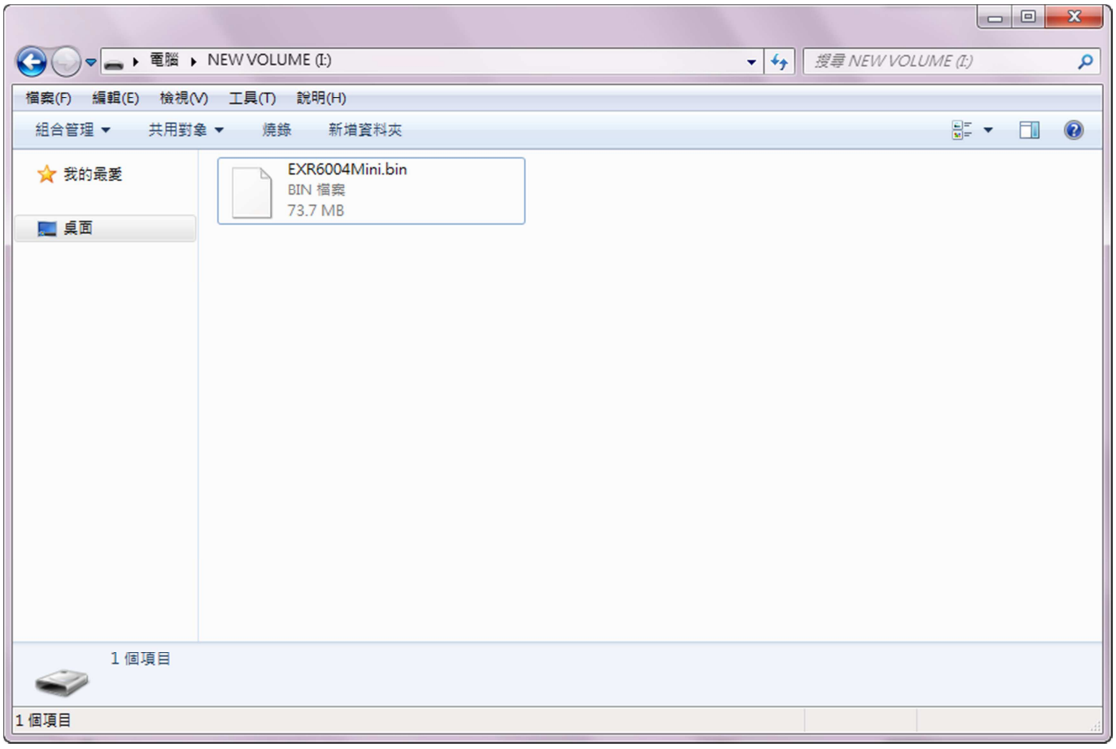


Step 4.Insert USB pen drive to EXR6004 Mini server

Step 5.Press System setup button on the main user interface

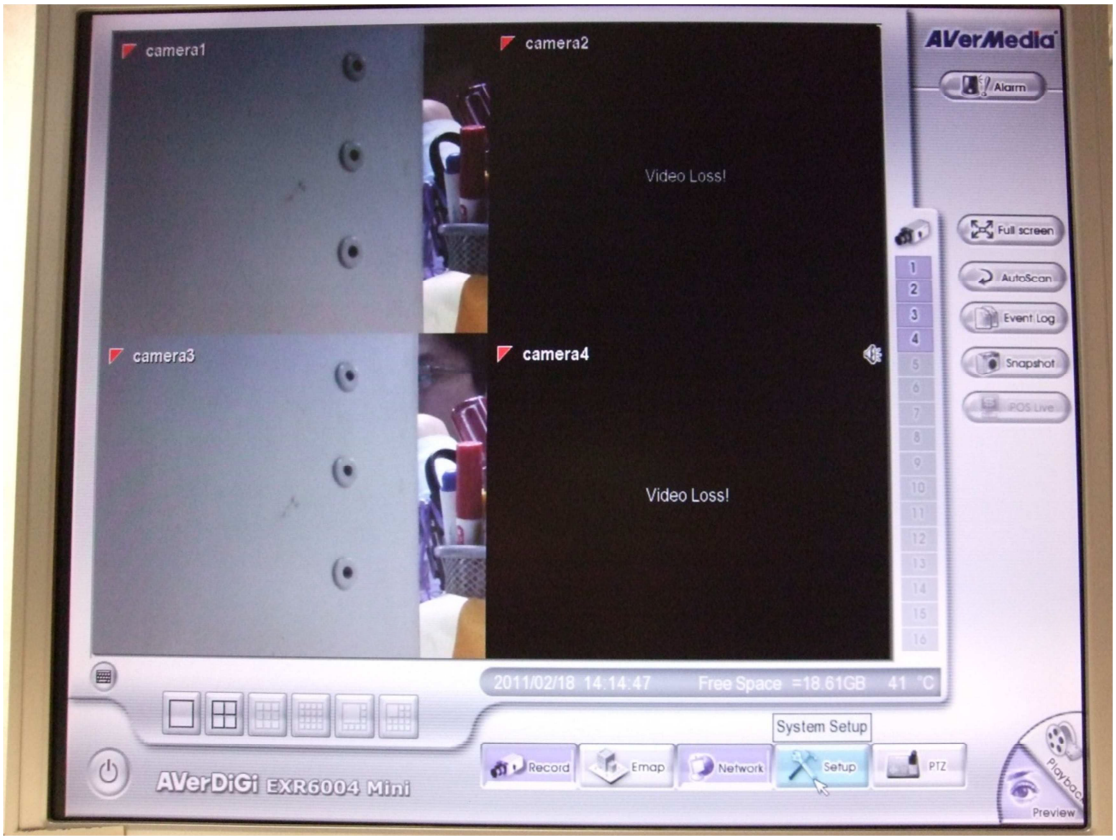

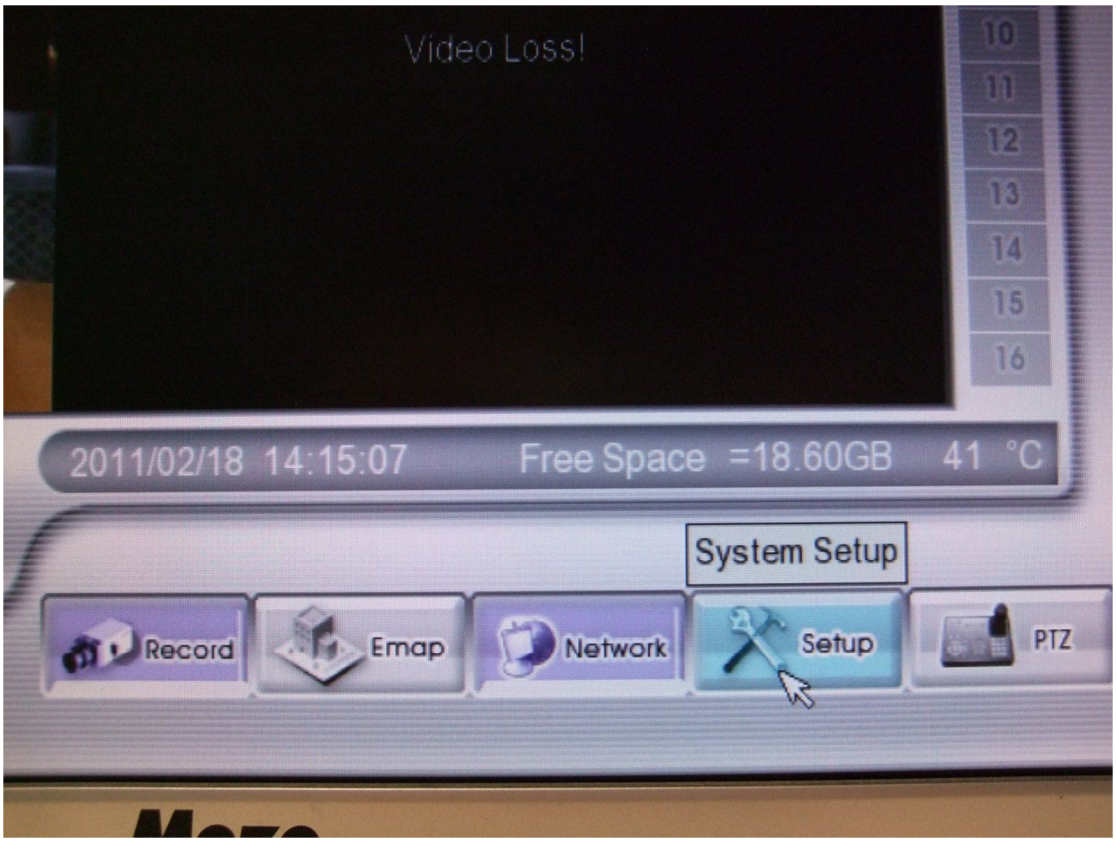


Step 6. Input the admin level ID and password to access the Setup.

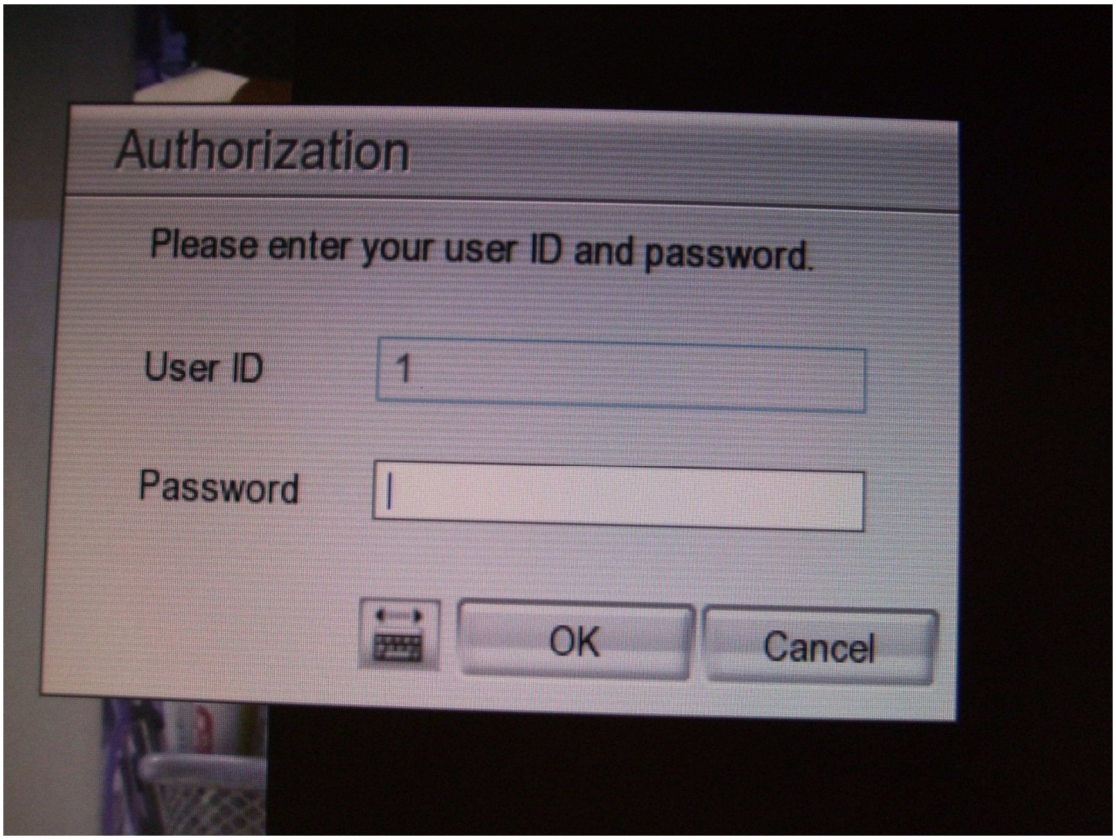


Step 7 Please enter System setting




Step 8.At the lower right handed side, you will find firmware and IP Camera module column. Please press Update button to perform firmware update.

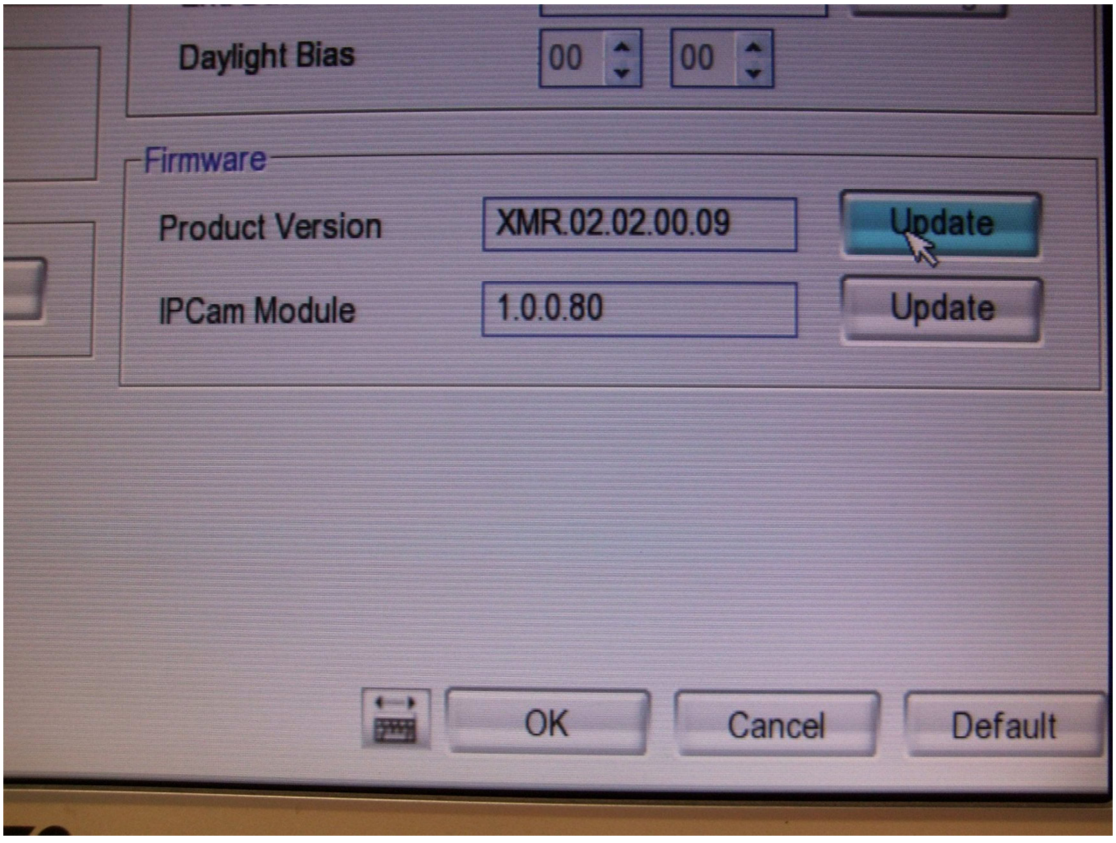


Step 9.System will detect USB pen drive automatically and will show firmware version inside DVR(Current firmware version) and firmware version inside USB pen drive(New firmware version). Please press OK button to proceed update. *If system doesn't detect USB pen drive correctly, please try other USB pen drive or make sure the USB pen drive is in FAT 32 format.*

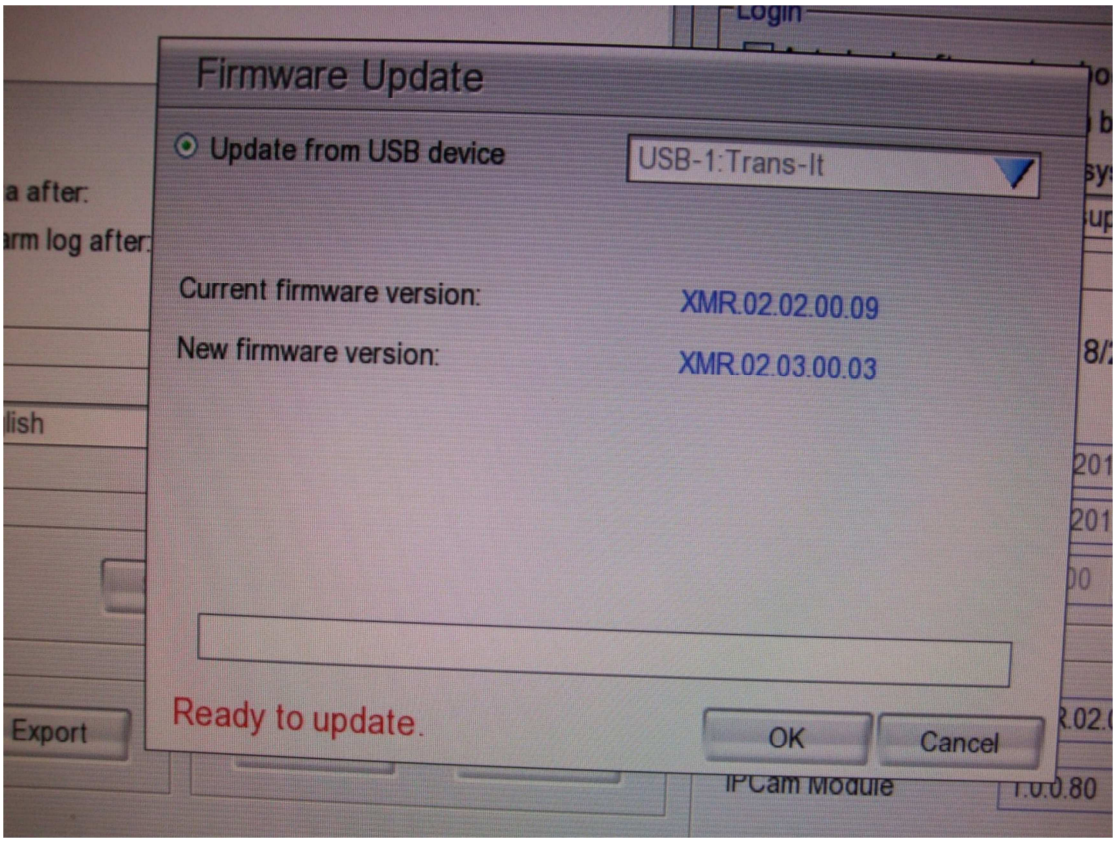



Step10. Press OK to process

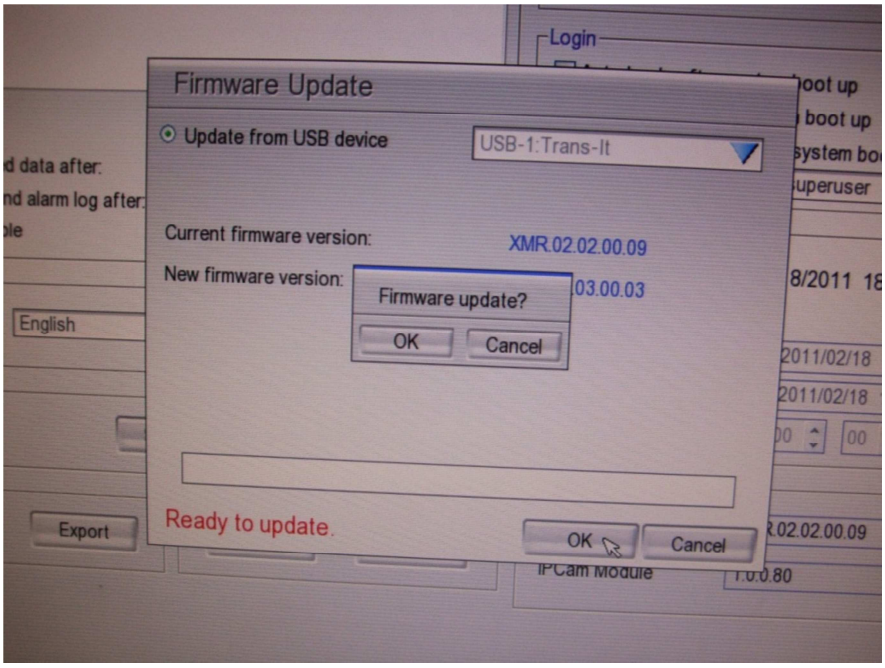


Step 11.While updating, please do not power off the DVR and wait for the firmware update progress bar to reach the end. You can see DVR LAN 1 and LAN2 lights are flashing during the update.

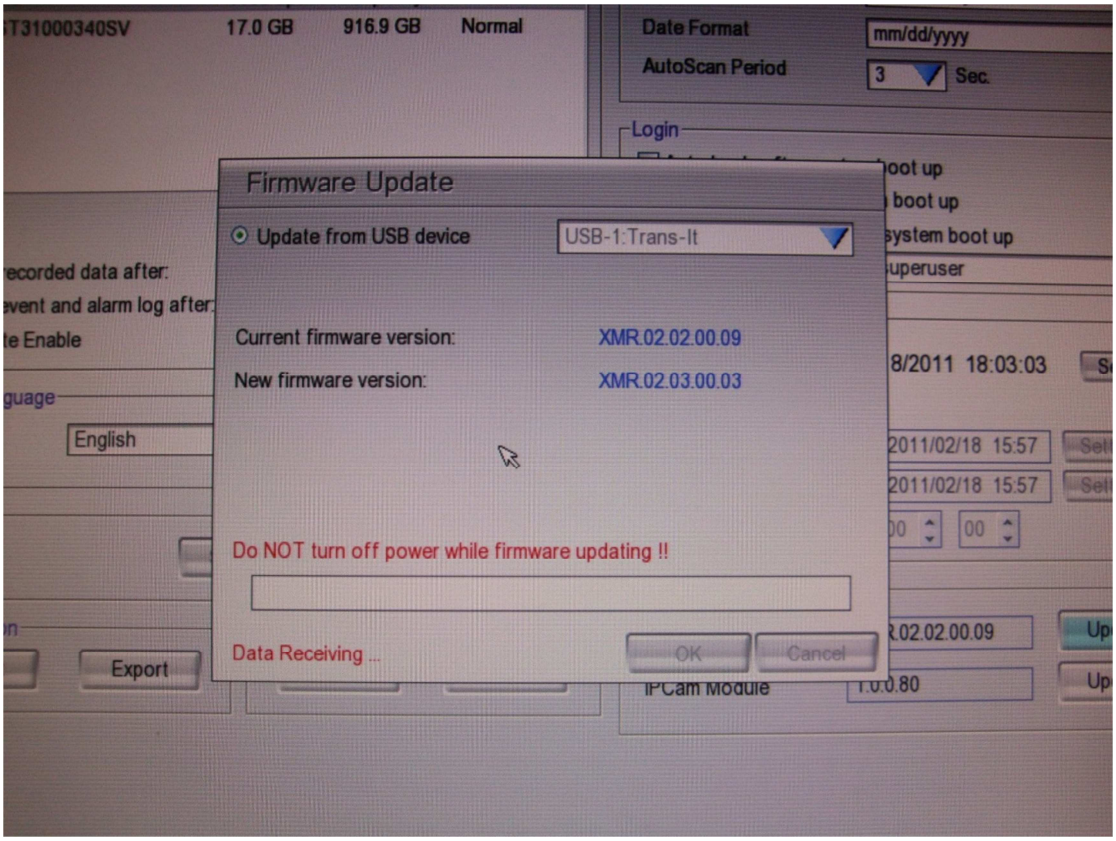

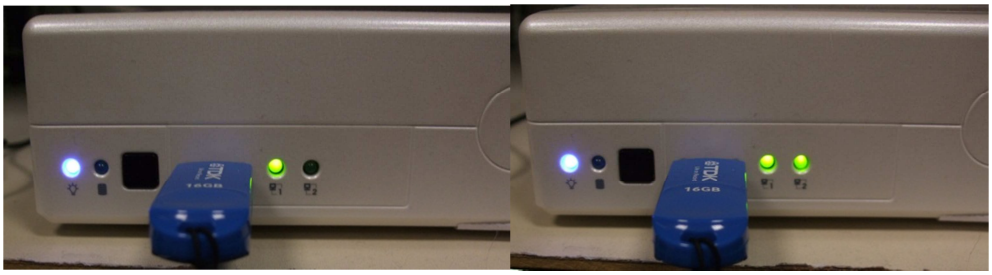

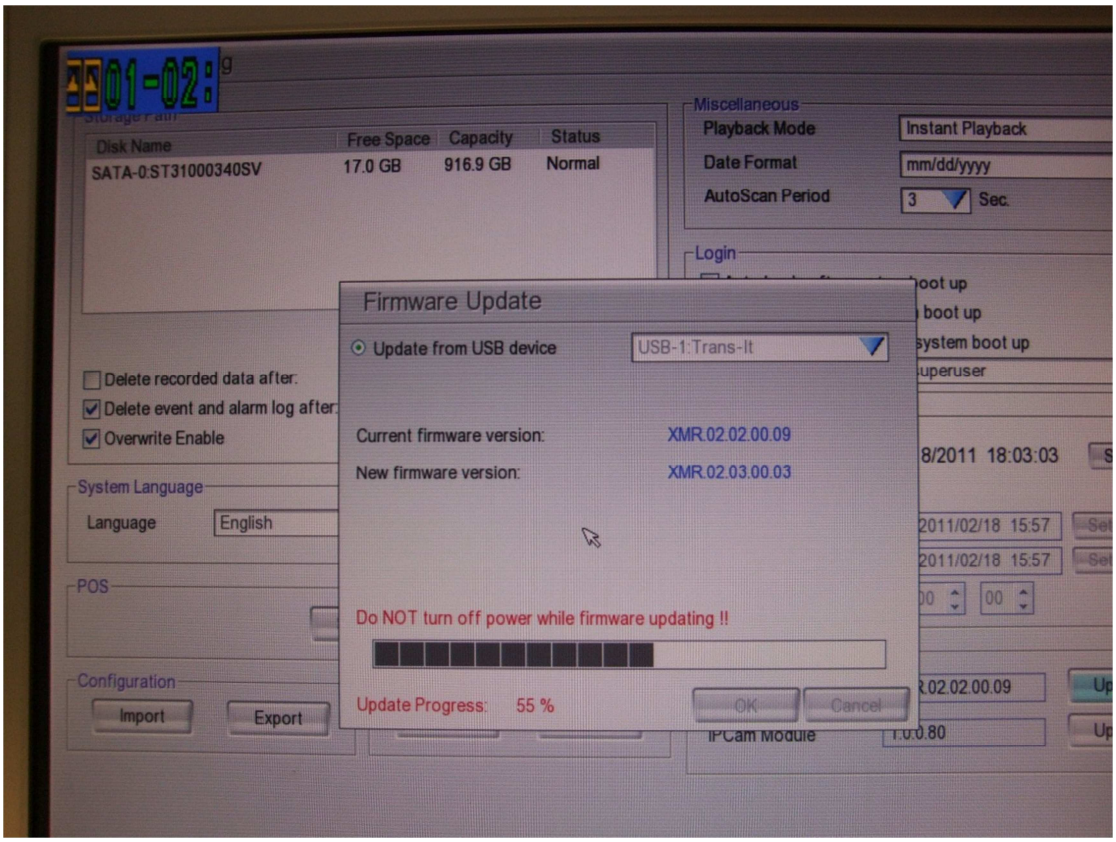

Step 12.After updated, please press OK and wait for system reboots.

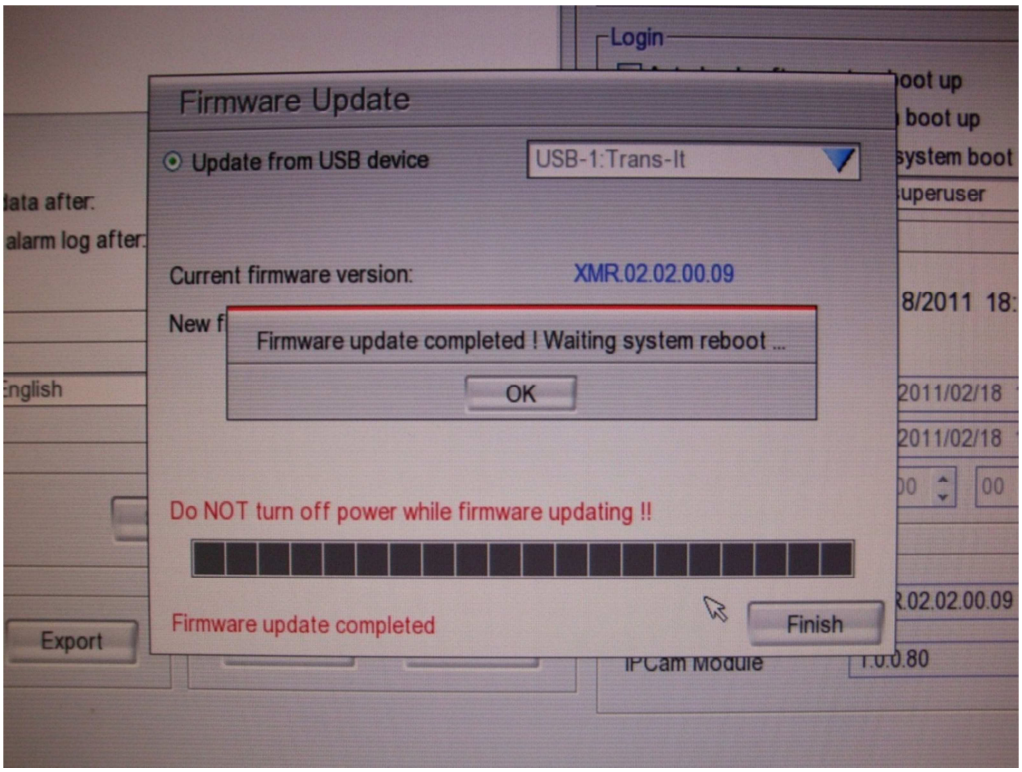

Step 13.When the DVR starts to boot up, please make sure remove the USB pend drive from the USB port.